

Silicon Diode

BYM26C

600V/2.3A

DATASHEET

OEM – Philips

Source: Philips Databook 1999

Fast soft-recovery controlled avalanche rectifiers

BYM26 series


FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability
- Available in ammo-pack
- Also available with preformed leads for easy insertion.

DESCRIPTION

Rugged glass SOD64 package, using a high temperature alloyed

construction. This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

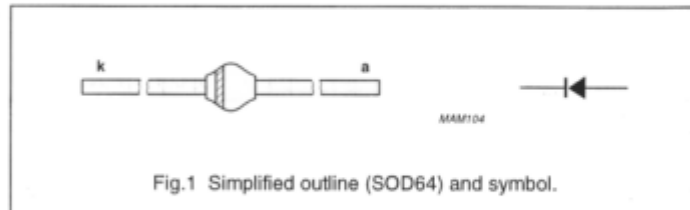

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

| SYMBOL | PARAMETER | CONDITIONS | MIN. | MAX. | UNIT |
|-------------|---------------------------------|---|------|--------------|------|
| V_{RRM} | repetitive peak reverse voltage | | | | |
| | BYM26A | | – | 200 | V |
| | BYM26B | | – | 400 | V |
| | BYM26C | | – | 600 | V |
| | BYM26D | | – | 800 | V |
| | BYM26E | | – | 1000 | V |
| | BYM26F BYM26G | | – | 1200 1400 | V |
| V_R | continuous reverse voltage | | | | |
| | BYM26A | | – | 200 | V |
| | BYM26B | | – | 400 | V |
| | BYM26C | | – | 600 | V |
| | BYM26D | | – | 800 | V |
| | BYM26E | | – | 1000 | V |
| | BYM26F BYM26G | | – | 1200 1400 | V |
| $I_{F(AV)}$ | average forward current | $T_{ip} = 55\text{ °C}$; lead length = 10 mm; see Figs 2 and 3; averaged over any 20 ms period; see also Figs 10 and 11 | | | |
| | BYM26A to E BYM26F and G | | – | 2.30 2.40 | A |
| $I_{F(AV)}$ | average forward current | $T_{amb} = 65\text{ °C}$; PCB mounting (see Fig.19); see Figs 4 and 5; averaged over any 20 ms period; see also Figs 10 and 11 | | | |
| | BYM26A to E BYM26F and G | | – | 1.05 1.00 | A |

Fast soft-recovery
controlled avalanche rectifiers

BYM26 series

| SYMBOL | PARAMETER | CONDITIONS | MIN. | MAX. | UNIT |
|-----------|--|---|------|------|------|
| I_{FRM} | repetitive peak forward current | $T_{ip} = 55\text{ °C}$; see Figs 6 and 7 | - | 19 | A |
| | BYM26A to E | | | 21 | A |
| I_{FRM} | repetitive peak forward current | $T_{amb} = 65\text{ °C}$; see Figs 8 and 9 | - | 8.0 | A |
| | BYM26A to E | | | 8.5 | A |
| I_{FSM} | non-repetitive peak forward current | $t = 10\text{ ms}$ half sine wave; $T_j = T_{j,max}$ prior to surge; $V_R = V_{RRMmax}$ | - | 45 | A |
| E_{RSM} | non-repetitive peak reverse avalanche energy | $L = 120\text{ mH}$; $T_j = T_{j,max}$ prior to surge; inductive load switched off | - | 10 | mJ |
| T_{stg} | storage temperature | | -65 | +175 | °C |
| T_j | junction temperature | see Figs 12 and 13 | -65 | +175 | °C |

ELECTRICAL CHARACTERISTICS

$T_j = 25\text{ °C}$ unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT | | | | |
|-------------|-------------------------------------|--|------|------|------|------|------|---|---|---|
| V_F | forward voltage | $I_F = 2\text{ A}$; $T_j = T_{j,max}$; see Figs 14 and 15 | - | - | 1.34 | V | | | | |
| | BYM26A to E | | | | 1.34 | V | | | | |
| V_F | forward voltage | $I_F = 2\text{ A}$; see Figs 14 and 15 | - | - | 2.65 | V | | | | |
| | BYM26A to E | | | | 2.30 | V | | | | |
| $V_{(BR)R}$ | reverse avalanche breakdown voltage | $I_R = 0.1\text{ mA}$ | | | | | | | | |
| | BYM26A | | | | | | 300 | - | - | V |
| | BYM26B | | | | | | 500 | - | - | V |
| | BYM26C | | | | | | 700 | - | - | V |
| | BYM26D | | | | | | 900 | - | - | V |
| | BYM26E | | | | | | 1100 | - | - | V |
| | BYM26F | | | | | | 1300 | - | - | V |
| | BYM26G | | | | | | 1500 | - | - | V |
| I_R | reverse current | $V_R = V_{RRMmax}$; see Fig.16 | - | - | 10 | µA | | | | |
| | | $V_R = V_{RRMmax}$; $T_j = 165\text{ °C}$; see Fig.16 | - | - | 150 | µA | | | | |
| t_{rr} | reverse recovery time | when switched from $I_F = 0.5\text{ A}$ to $I_R = 1\text{ A}$; measured at $I_R = 0.25\text{ A}$; see Fig.20 | - | - | 30 | ns | | | | |
| | BYM26A to C | | | | 75 | ns | | | | |
| | BYM26D and E | | | | 150 | ns | | | | |

Fast soft-recovery
controlled avalanche rectifiers

BYM26 series

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|----------------------------------|---|--|------|------|------------------------|------------------------|
| C_d | diode capacitance | $f = 1 \text{ MHz}$; $V_R = 0 \text{ V}$; see Figs 17 and 18 | - | 85 | - | pF |
| | BYM26A to C | | | | | |
| | BYM26D and E | | | | | |
| | BYM26F and G | | 65 | | pF | |
| $\left \frac{dI_R}{dt} \right $ | maximum slope of reverse recovery current | when switched from $I_F = 1 \text{ A}$ to $V_R \geq 30 \text{ V}$ and $dI_F/dt = -1 \text{ A}/\mu\text{s}$; see Fig.21 | - | - | 7 | $\text{A}/\mu\text{s}$ |
| | BYM26A to C | | | | | |
| | BYM26D and E | | | | | |
| | BYM26F and G | | 5 | | $\text{A}/\mu\text{s}$ | |

THERMAL CHARACTERISTICS

| SYMBOL | PARAMETER | CONDITIONS | VALUE | UNIT |
|-----------------------|---|---------------------|-------|------|
| $R_{th\ j\text{-}tp}$ | thermal resistance from junction to tie-point | lead length = 10 mm | 25 | K/W |
| $R_{th\ j\text{-}a}$ | thermal resistance from junction to ambient | note 1 | 75 | K/W |





Note

1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer $\geq 40 \mu\text{m}$, see Fig.19. For more information please refer to the 'General Part of Handbook SC01'.

Fast soft-recovery
controlled avalanche rectifiers



BYM26 series

GRAPHICAL DATA

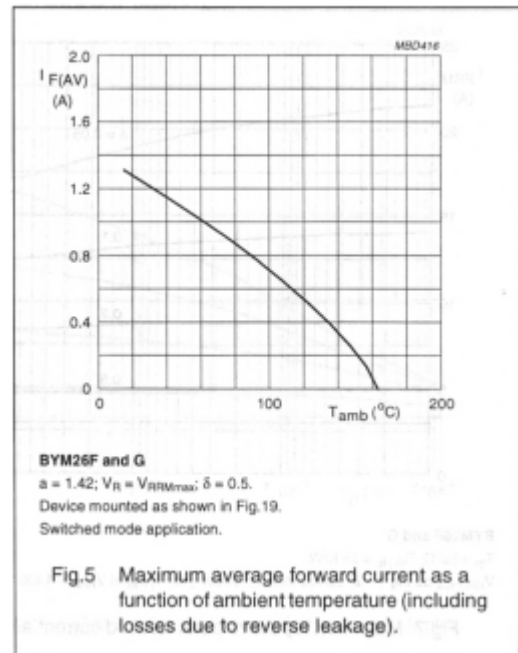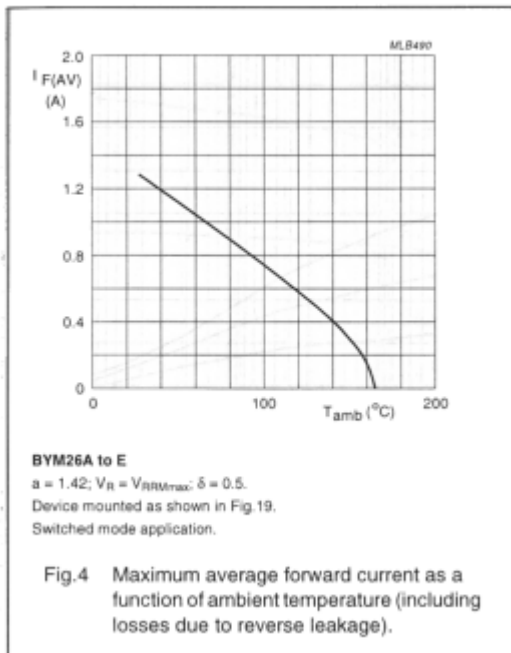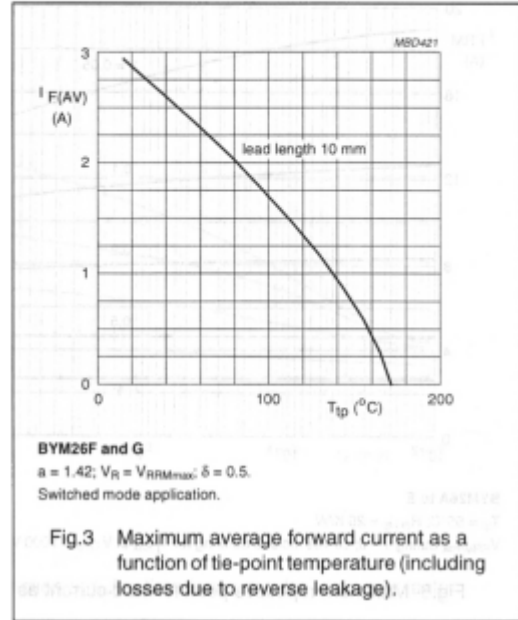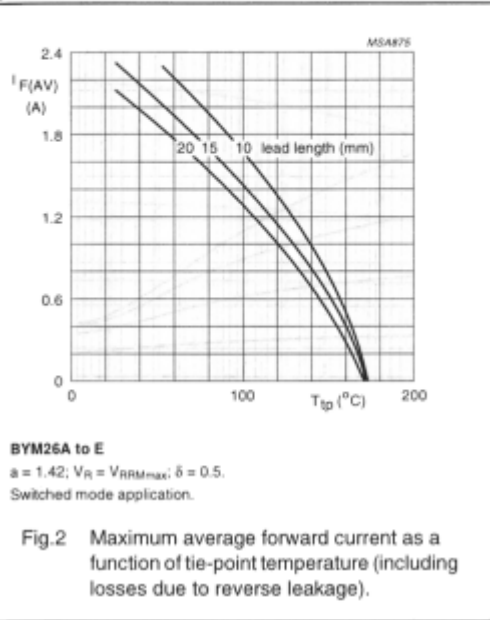


Fast soft-recovery
controlled avalanche rectifiers

BYM26 series

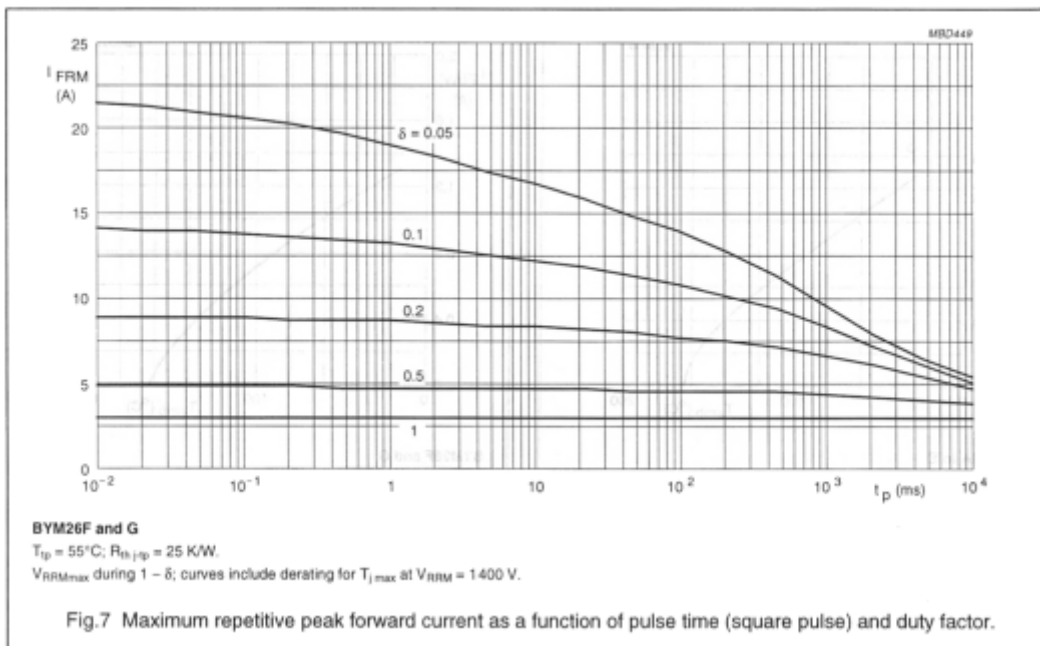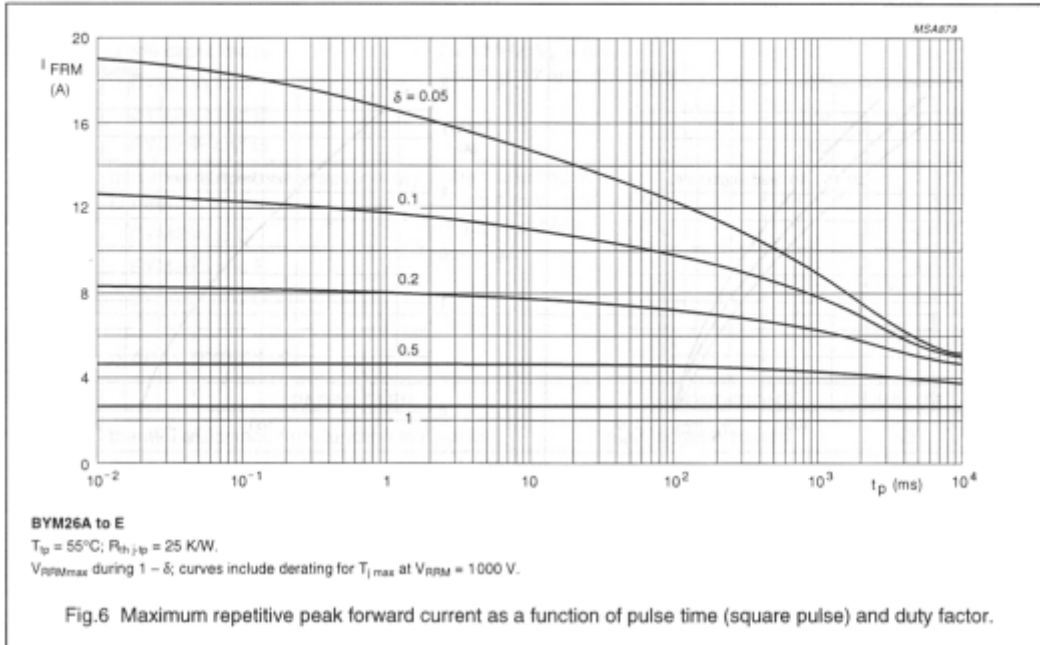

Fast soft-recovery
controlled avalanche rectifiers

BYM26 series

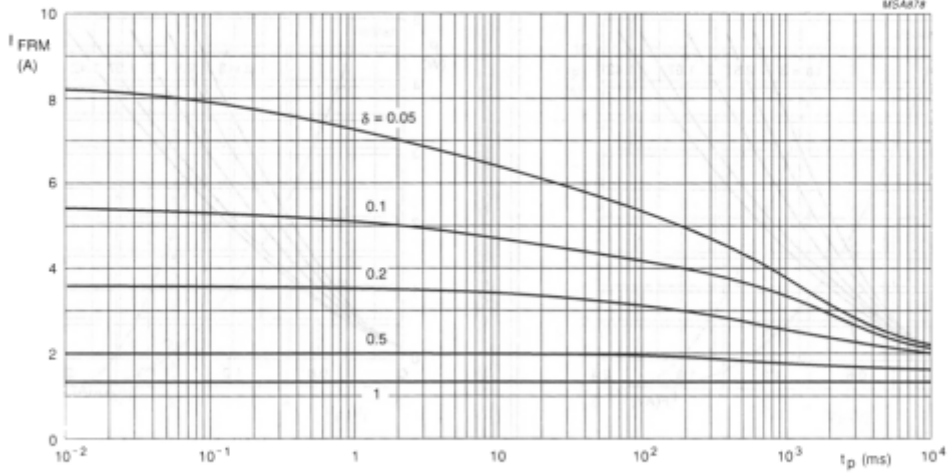


BYM26A to E

$T_{amb} = 65\text{ }^{\circ}\text{C}$; $R_{th(j-a)} = 75\text{ K/W}$.

V_{RRMmax} during $1 - \delta$; curves include derating for T_{jmax} at $V_{RRM} = 1000\text{ V}$.

Fig.8 Maximum repetitive peak forward current as a function of pulse time (square pulse) and duty factor.

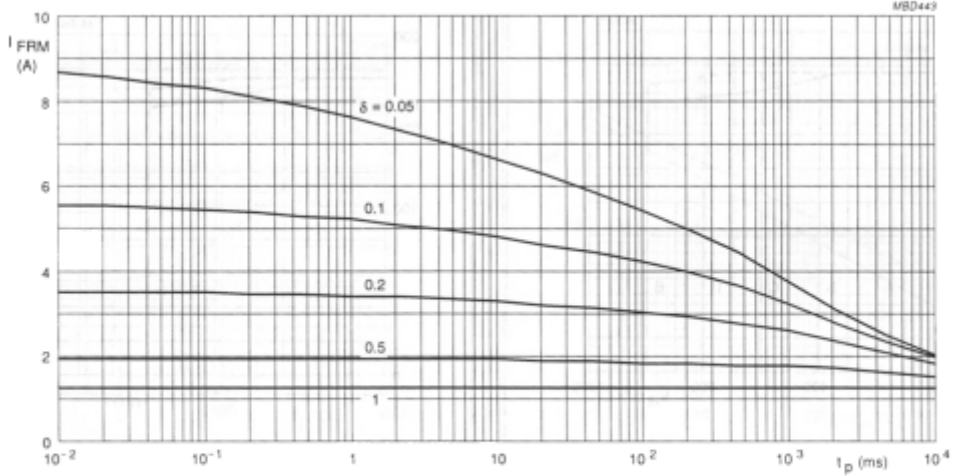

BYM26F and G





$T_{amb} = 65\text{ }^{\circ}\text{C}$; $R_{th(j-a)} = 75\text{ K/W}$.

V_{RRMmax} during $1 - \delta$; curves include derating for T_{jmax} at $V_{RRM} = 1400\text{ V}$.

Fig.9 Maximum repetitive peak forward current as a function of pulse time (square pulse) and duty factor.





Fast soft-recovery
controlled avalanche rectifiers

BYM26 series

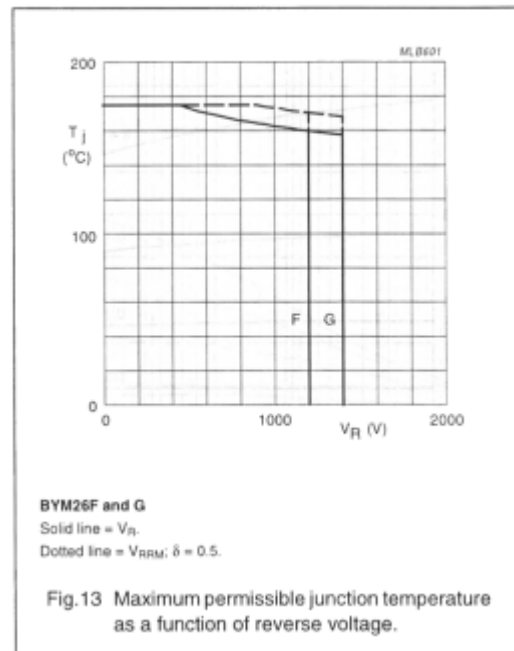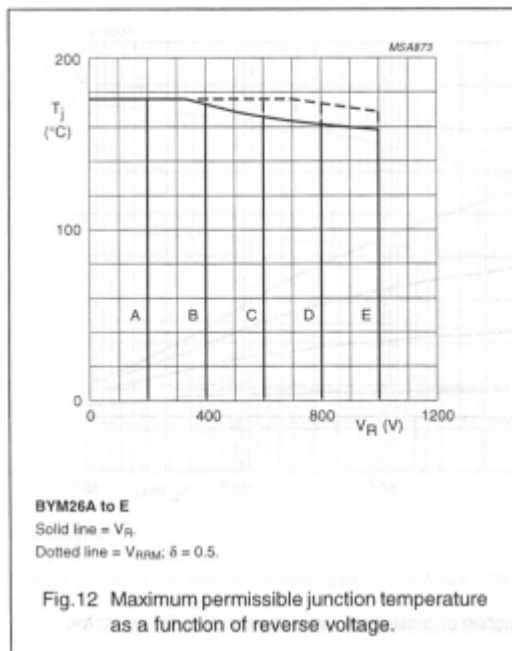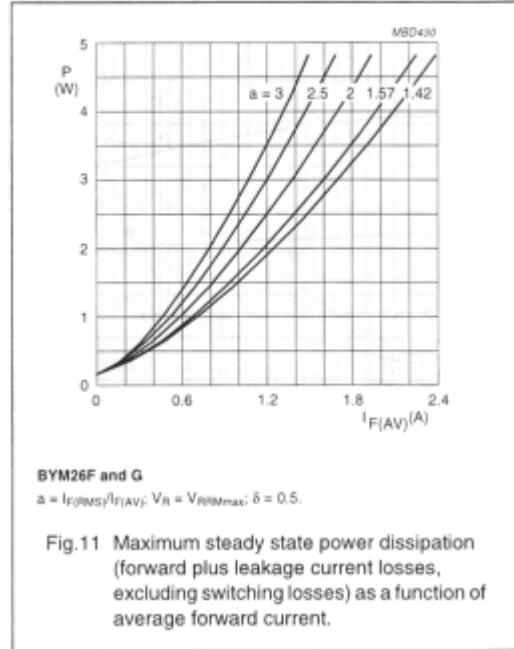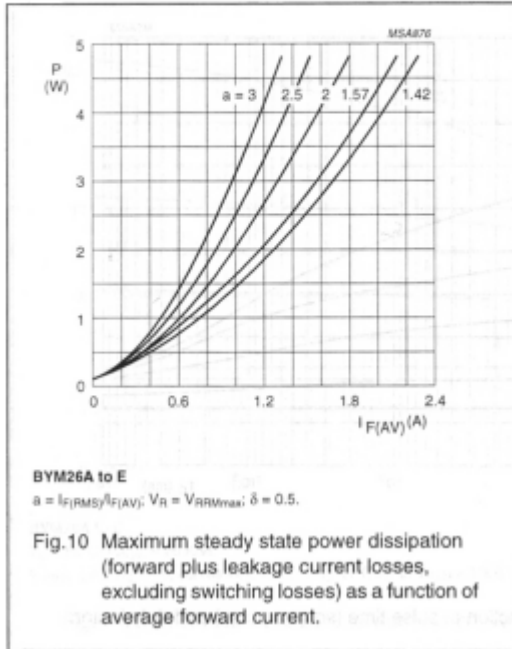




Fast soft-recovery
controlled avalanche rectifiers

BYM26 series

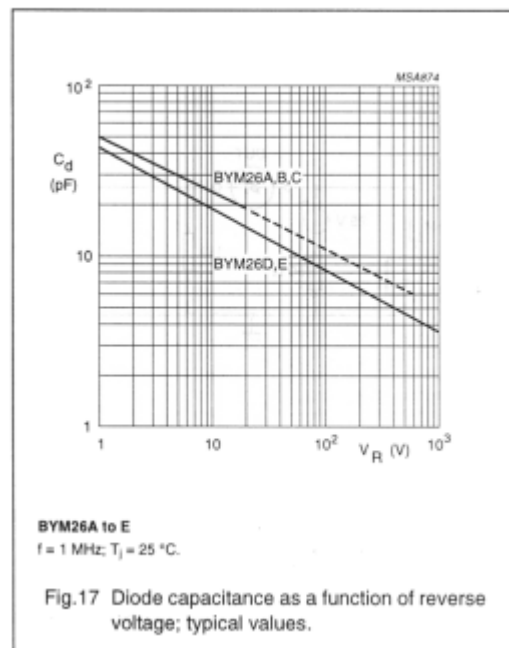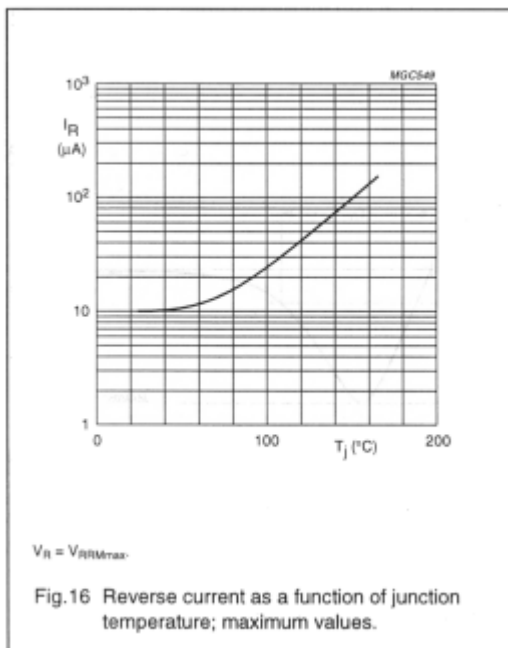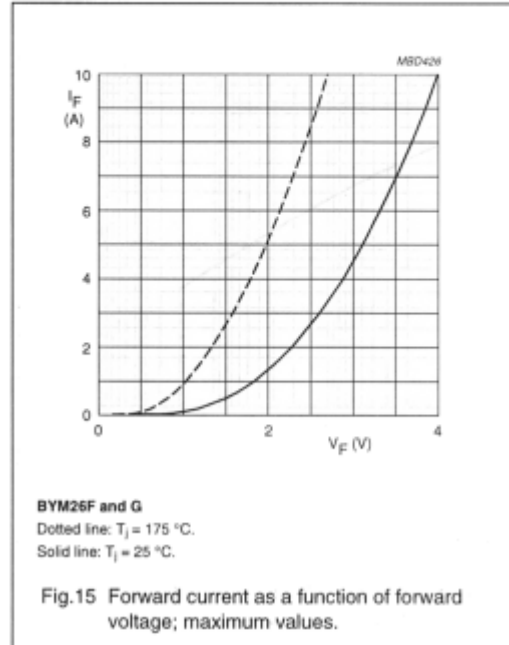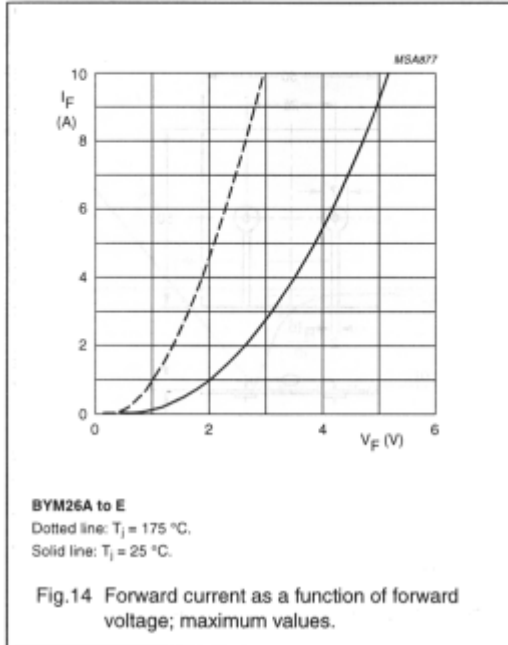

Fast soft-recovery
controlled avalanche rectifiers

BYM26 series

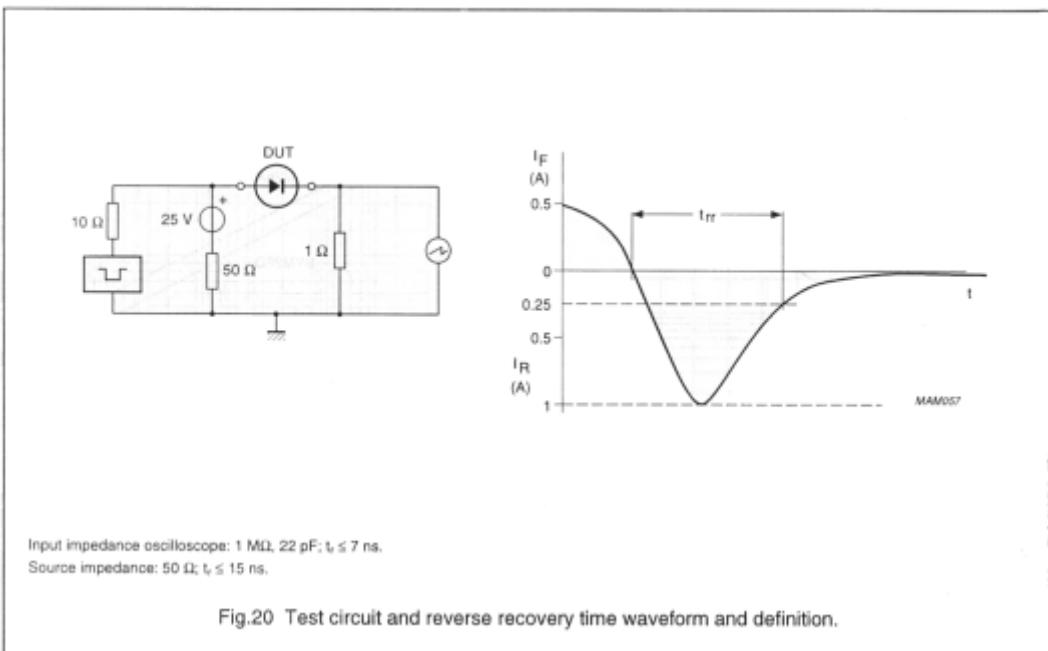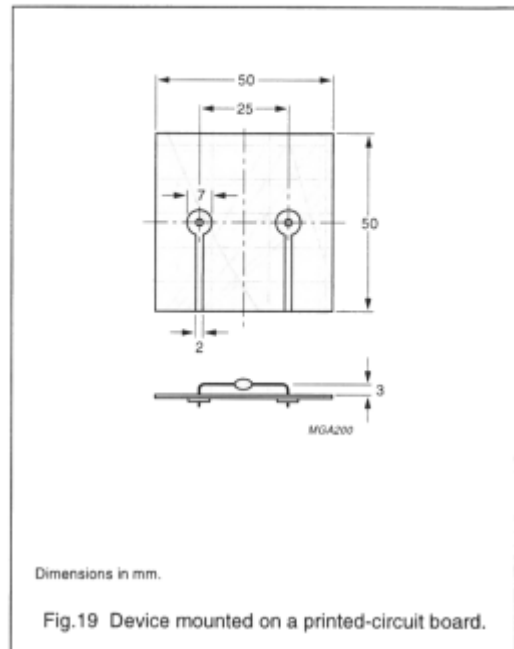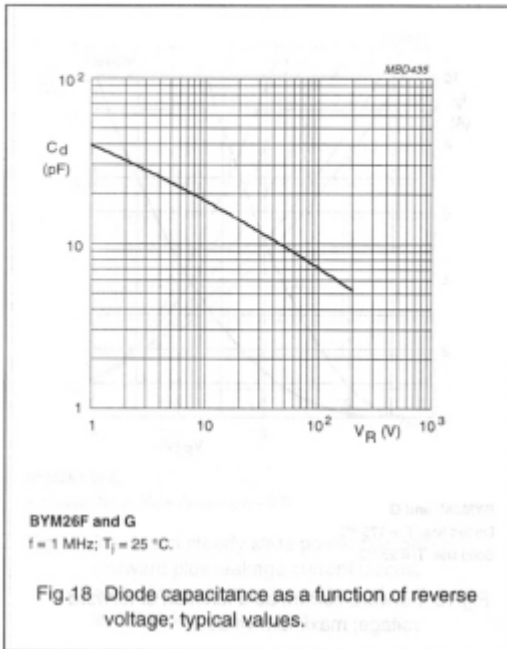

**Fast soft-recovery
controlled avalanche rectifiers**

BYM26 series

