

Silicon - Diode

BAV21

200V / 300mA / 500mW

General Purpose Diode

DATASHEET

OEM – Fairchild

Source: Fairchild Databook 1978

BAV17 • BAV18 • BAV19 • BAV20 • BAV21

GENERAL PURPOSE DIODES

DIFFUSED SILICON PLANAR

- $V_F \dots 1.0 \text{ V (Max) @ } 100 \text{ mA}$
- $I_R \dots 100 \text{ nA @ WIV}$

ABSOLUTE MAXIMUM RATINGS (Note 1)

Temperatures


Storage Temperature Range	-65°C to +200°C
Maximum Junction Operating Temperature	+175°C
Lead Temperature	+260°C

Power Dissipation (Note 2)

Maximum Total Power Dissipation at 25°C Ambient	500 mW
Linear Power Derating Factor (from 25°C)	3.33 mW / °C

Maximum Voltage and Currents

WIV	Working Inverse Voltage	
BAV 17		20 V
BAV 18		50 V
BAV 19		100 V
BAV 20		150 V
BAV 21		200 V
I_O	Average Rectified Current	100 mA
I_F	Continuous Forward Current	300 mA
i_f	Peak Repetitive Forward Current	400 mA
$i_f(\text{surge})$	Peak Forward Surge Current	
	Pulse Width = 1 μs	4 A
	Pulse Width = 1 s	1 A

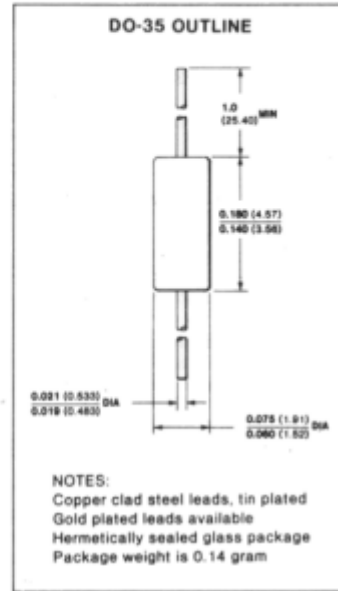

ELECTRICAL CHARACTERISTICS (25°C Ambient Temperature unless otherwise noted)

SYMBOL	CHARACTERISTIC	MIN	TYP	MAX	UNITS	TEST CONDITIONS
V_F	Forward Voltage			1.00	V	$I_F = 100 \text{ mA}$
				1.25	V	$I_F = 200 \text{ mA}$
I_R	Reverse Current	BAV 21		100	nA	$V_R = 200 \text{ V}$
				15	μA	$V_R = 200 \text{ V}, T_A = 100^\circ\text{C}$
		BAV 20		100	nA	$V_R = 150 \text{ V}$
				15	μA	$V_R = 150 \text{ V}, T_A = 100^\circ\text{C}$
		BAV 19		100	nA	$V_R = 100 \text{ V}$
				15	μA	$V_R = 100 \text{ V}, T_A = 100^\circ\text{C}$
BV	Breakdown Voltage	BAV 21	250		V	$I_R = 100 \mu\text{A}$
		BAV 20	200		V	$I_R = 100 \mu\text{A}$
		BAV 19	120		V	$I_R = 100 \mu\text{A}$
		BAV 18	60		V	$I_R = 100 \mu\text{A}$
		BAV 17	25		V	$I_R = 100 \mu\text{A}$
C	Capacitance		1.5	5.0	pF	$V_R = 0, f = 1 \text{ MHz}$
t_{rr}	Reverse Recovery Time (Note 3)			50	ns	$I_F = 30 \text{ mA}, I_R = 30 \text{ mA}, R_L = 100 \Omega$
diff	Differential Resistance		5.0		Ω	$I_F = 10 \text{ mA}$

- NOTES:
1. These ratings are limiting values above which the serviceability of the diode may be impaired.
 2. These are steady state limits. The factory should be consulted on applications involving pulsed or low duty-cycle operation.
 3. Recovery to $I_R = 3 \text{ mA}$.
 4. For product family characteristic curves, refer to Chapter 4 BAV 17/18 D4, BAV 19/20/21 D1.