

Silicon Diode

FEPB6CT

Fast Efficient Rectifier

150V / 6A

DATASHEET

from

www.web-bcs.com

OEM – General Semiconductor


Source: General Semiconductor Databook 1998

NEW PRODUCT NEW PRODUCT NEW PRODUCT

FEPB6AT THRU FEPB6DT

FAST EFFICIENT PLASTIC RECTIFIER
 Reverse Voltage - 50 to 200 Volts Forward Current - 6.0 Amperes

TO-263AB

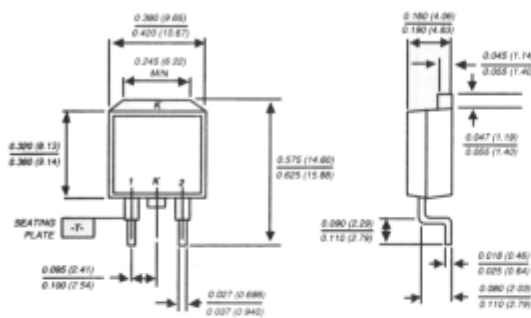

Dimensions are in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Dual rectifier construction, positive center-tap
- ◆ Glass passivated chip junctions
- ◆ Superfast recovery times for high efficiency
- ◆ Low power loss
- ◆ Low forward voltage, high current capability
- ◆ For use in low voltage, high frequency inverters, free wheeling and polarity protection applications
- ◆ High temperature soldering in accordance with CECC 802 / Reflow guaranteed



MECHANICAL DATA

Case: JEDEC TO-263AB molded plastic body
Terminals: Plated lead solderable per MIL-STD-750, Method 2026
Polarity: As marked
Mounting Position: Any
Weight: 0.08 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	FEPB6AT	FEPB6BT	FEPB6CT	FEPB6DT	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	Volts
Maximum RMS voltage	V_{RMS}	35	70	105	140	Volts
Maximum DC blocking voltage	V_{DC}	50	100	150	200	Volts
Maximum average forward rectified current $T_C=100^\circ\text{C}$	$I_{(AV)}$	6.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	100.0				Amps
Maximum instantaneous forward voltage per leg at 3.0A	V_F	0.975				Volts
Maximum DC reverse current at rated DC blocking voltage $T_C=25^\circ\text{C}$ $T_C=100^\circ\text{C}$	I_R	5.0 50.0				μA
Maximum reverse recovery time per leg (NOTE 1)	t_{rr}	35.0				ns
Typical thermal resistance (NOTE 2)	$R_{\theta JC}$	3.6				$^\circ\text{C/W}$
Typical junction capacitance per leg (NOTE 3)	C_J	28.0				pF
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150				$^\circ\text{C}$

NOTES:

- (1) Reverse recovery test conditions: $I_F=0.5A, I_R=1.0A, I_m=0.25A$
- (2) Thermal resistance from junction to case per leg mounted on heatsink
- (3) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

RATINGS AND CHARACTERISTICS CURVES FEPB6AT THRU FEPB6DT

