

# Transient Voltage Suppressor Diode

## **TPSCMC39**

(TPSCMC6.8 thru TPSCMC43A Series)

Breakdown-Voltage 6.8 to 43V

Peak Pulse Power 1500W

Automotive Applications

# DATASHEET

from

[www.web-bcs.com](http://www.web-bcs.com)

OEM – General Semiconductor

Source: General Semiconductor Databook 1998


# TPSCM6.8 THRU TPSCM43A

## AUTOMOTIVE SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR

Breakdown Voltage - 6.8 to 43 Volts Peak Pulse Power - 1500 Watts

**PATENTED**

DO-214AB  
Modified J-Bend

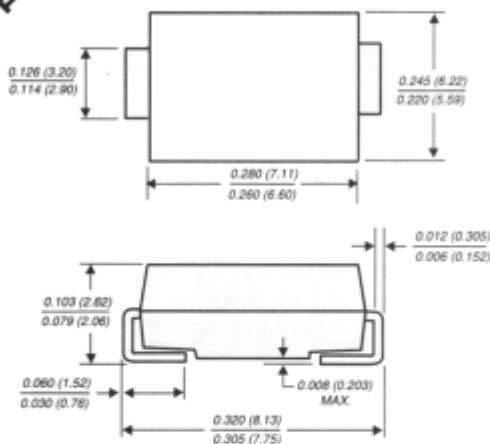

Dimensions in inches and (millimeters)

Available in unidirectional only

### FEATURES

- ◆ Designed for under the hood surface mount applications
- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Easy pick and place
- ◆ Low profile package
- ◆ Built-in strain relief
- ◆ Ideal for automated placement
- ◆ Exclusive G.I. patented Passivated Anisotropic Rectifier (PAR) chip construction
- ◆ 1500W peak pulse power capability with a 10/1000µs waveform, repetition rate (duty cycle): 0.01%
- ◆ Excellent clamping capability
- ◆ Low incremental surge resistance
- ◆ Fast response time: typically less than 1.0ps from 0 Volts to  $V_{(BR)}$
- ◆ For devices with  $V_{(BR)} \geq 10V$   $I_D$  are typically less than 1.0µA at  $T_A=150^\circ C$
- ◆ High temperature soldering: 250°C/10 seconds at terminals



### MECHANICAL DATA

**Case:** JEDEC DO-214AB molded plastic body over passivated junction

**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes positive end (cathode)

**Mounting Position:** Any

**Weight:** 0.007 ounces, 0.2 gram

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	VALUE	UNITS
Peak pulse power dissipation with a 10/1000µs waveform (NOTES 1, 2, FIG. 3)	PPPM	Minimum 1500	Watts
Peak power pulse current with a 10/1000µs waveform (NOTE 1, FIG. 1)	IPPM	SEE TABLE 1	Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) (NOTES 2, 3)	IFSM	200.0	Amps
Maximum instantaneous forward voltage at 100A (NOTE 3)	V <sub>F</sub>	3.5	Volts
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +185	°C

**NOTES:**

(1) Non-repetitive current pulse, per Fig.3 and derated above  $T_A=25^\circ C$  per Fig. 2

(2) Mounted on 0.31 X 0.31" (8.0 X 8.0mm) copper pads to each terminal

(3) Measured on 8.3ms single half sine-wave, or equivalent square wave, duty cycle=4 pulses per minute maximum

**ELECTRICAL CHARACTERISTICS at (TA=25°C unless otherwise noted)**

Device	Device Marking Code	Breakdown Voltage V <sub>(BR)</sub> (Volts) (NOTE 1)		Test Current at I <sub>T</sub> (mA)	Stand-off Voltage V <sub>W0</sub> (Volts)	Maximum Reverse Leakage at V <sub>W0</sub> I <sub>R</sub> (µA)	Maximum Reverse Leakage at V <sub>W0</sub> , T <sub>J</sub> =150°C I <sub>R</sub> (µA)	Maximum Peak Pulse Surge Current I <sub>PPM</sub> (NOTE 2) (Amps)	Maximum Clamping Voltage at I <sub>PP</sub> V <sub>C</sub> (Volts)
		Min.	Max.						
TPSMC6.8	DDP	6.12	7.48	10.0	5.50	500.0	1000.0	145.0	10.8
TPSMC6.8A	DEP	6.45	7.14	10.0	5.80	500.0	1000.0	150.0	10.5
TPSMC7.5	DFP	6.75	8.25	10.0	6.05	250.0	500.0	134.0	11.7
TPSMC7.5A	DGP	7.13	7.88	10.0	6.40	250.0	500.0	139.0	11.3
TPSMC8.2	DHP	7.38	9.02	10.0	6.63	100.0	200.0	126.0	12.5
TPSMC8.2A	DKP	7.79	8.61	10.0	7.02	100.0	200.0	130.0	12.1
TPSMC9.1	DLP	8.19	10.0	1.0	7.37	25.0	50.0	114.0	13.8
TPSMC9.1A	DMP	8.65	9.55	1.0	7.78	25.0	50.0	117.0	13.4
TPSMC10	DNP	9.00	11.0	1.0	8.10	10.0	25.0	105.0	15.0
TPSMC10A	DPP	9.50	10.5	1.0	8.55	10.0	25.0	108.0	14.5
TPSMC11	DOP	9.90	12.1	1.0	8.92	2.0	10.0	97.0	16.2
TPSMC11A	DRP	10.5	11.6	1.0	9.40	2.0	10.0	100.0	15.6
TPSMC12	DSP	10.8	13.2	1.0	9.72	2.0	10.0	91.0	17.3
TPSMC12A	DTP	11.4	12.6	1.0	10.2	2.0	10.0	94.0	16.7
TPSMC13	DUP	11.7	14.3	1.0	10.5	2.0	10.0	82.0	19.0
TPSMC13A	DVP	12.4	13.7	1.0	11.1	2.0	10.0	86.0	18.2
TPSMC15	DWP	13.5	16.5	1.0	12.1	2.0	10.0	71.0	22.0
TPSMC15A	DXP	14.3	15.8	1.0	12.8	2.0	10.0	74.0	21.2
TPSMC16	DYP	14.4	17.6	1.0	12.9	2.0	10.0	67.0	23.5
TPSMC16A	DZP	15.2	16.8	1.0	13.6	2.0	10.0	70.0	22.5
TPSMC18	EDP	16.2	19.8	1.0	14.5	2.0	10.0	59.0	26.5
TPSMC18A	EEP	17.1	18.9	1.0	15.3	2.0	10.0	60.0	25.2
TPSMC20	EFP	18.0	22.0	1.0	16.2	2.0	10.0	54.0	29.1
TPSMC20A	EGP	19.0	21.0	1.0	17.1	2.0	10.0	56.0	27.7
TPSMC22	EHP	19.8	24.2	1.0	17.8	2.0	10.0	49.0	31.9
TPSMC22A	EKP	20.9	23.1	1.0	18.8	2.0	10.0	51.0	30.6
TPSMC24	ELP	21.6	26.4	1.0	19.4	2.0	10.0	45.0	34.7
TPSMC24A	EMP	22.8	25.2	1.0	20.5	2.0	10.0	47.0	33.2
TPSMC27	ENP	24.3	29.7	1.0	21.8	2.0	10.0	40.0	39.1
TPSMC27A	EPP	25.7	28.4	1.0	23.1	2.0	10.0	42.0	37.5
TPSMC30	EQP	27.0	33.0	1.0	24.3	2.0	10.0	36.0	43.5
TPSMC30A	ERP	28.5	31.5	1.0	25.6	2.0	10.0	38.0	41.4
TPSMC33	ESP	29.7	36.3	1.0	26.8	2.0	10.0	33.0	47.7
TPSMC33A	ETP	31.4	34.7	1.0	28.2	2.0	10.0	34.0	45.7
TPSMC36	EUP	32.4	39.6	1.0	29.1	2.0	10.0	30.0	52.0
TPSMC36A	EVP	34.2	37.8	1.0	30.8	2.0	10.0	31.0	49.9
TPSMC39	EWP	35.1	42.9	1.0	31.6	2.0	10.0	27.0	56.4
TPSMC39A	EXP	37.1	41.0	1.0	33.3	2.0	10.0	29.0	53.9
TPSMC43	EYP	38.7	47.3	1.0	34.8	2.0	10.0	25.0	61.9
TPSMC43A	EZP	40.9	45.2	1.0	36.8	2.0	10.0	26.0	59.3

**NOTES:**(1) V<sub>(BR)</sub> measured after I<sub>T</sub> applied for 300µs, I<sub>T</sub>=square wave pulse or equivalent

(2) Surge current waveform per Fig. 3 and derate per Fig. 2

**MAXIMUM RATINGS AND CHARACTERISTIC CURVES TPSCMC6.8 THRU TPSCMC43A**

FIG. 1 - PEAK PULSE POWER RATING CURVE

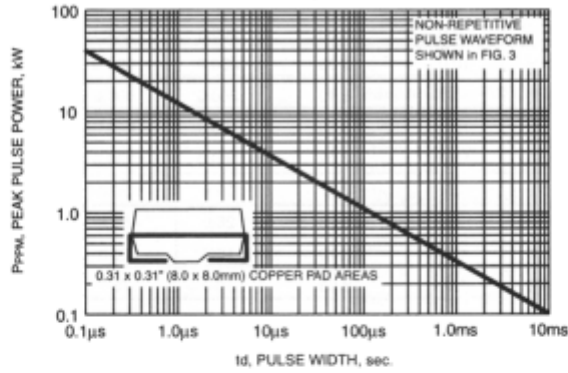


FIG. 2 - PULSE DERATING CURVE


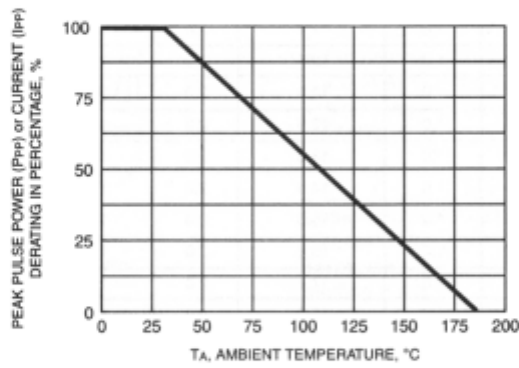


FIG. 3 - PULSE WAVEFORM



**MAXIMUM RATINGS AND CHARACTERISTIC CURVES TPSCMC6.8 THRU TPSCMC43A**

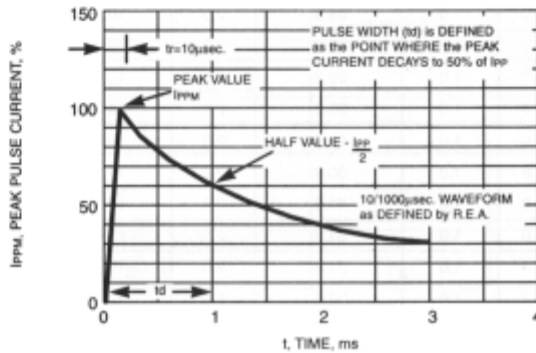