

Schottky Dual Diode

PBYR2060CTB

60V / 20A

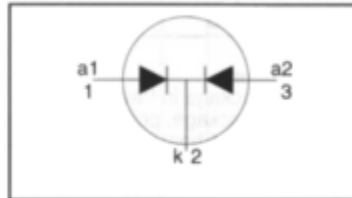
DATASHEET

OEM – Philips

Source: Philips Databook 1999

**Rectifier diodes
Schottky barrier**
PBYR20100CT, PBYR20100CTB series
FEATURES

- Low forward volt drop
- Fast switching
- Reverse surge capability
- High thermal cycling performance
- Low thermal resistance

SYMBOL

QUICK REFERENCE DATA

$$V_R = 60 \text{ V} / 80 \text{ V} / 100 \text{ V}$$

$$I_{O(AV)} = 20 \text{ A}$$

$$V_F \leq 0.7 \text{ V}$$



GENERAL DESCRIPTION

Dual, common cathode schottky rectifier diodes in a conventional leaded plastic package and a surface mounting plastic package. Intended for use as output rectifiers in low voltage, high frequency switched mode power supplies.

The PBYR20100CT series is supplied in the SOT78 conventional leaded package.
The PBYR20100CTB series is supplied in the SOT404 surface mounting package.

PINNING

PIN	DESCRIPTION
1	anode 1 (a)
2	cathode (k) ¹
3	anode 2 (a)
tab	cathode (k)

SOT78 (TO220AB)

SOT404

LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.			UNIT
				60CT 60CTB	80CT 80CTB	100CT 100CTB	
V_{RRM}	Peak repetitive reverse voltage	PBYR20 PBYR20	-	60	80	100	V
V_{RWM}	Working peak reverse voltage		-	60	80	100	V
V_R	Continuous reverse voltage	$T_{mb} \leq 139 \text{ }^\circ\text{C}$	-	60	80	100	V
$I_{O(AV)}$	Average rectified output current (both diodes conducting)	square wave; $\delta = 0.5$; $T_{mb} \leq 133 \text{ }^\circ\text{C}$	-	20			A
I_{FRM}	Repetitive peak forward current per diode	square wave; $\delta = 0.5$; $T_{mb} \leq 133 \text{ }^\circ\text{C}$	-	20			A
I_{FSM}	Non-repetitive peak forward current per diode	$t = 10 \text{ ms}$ $t = 8.3 \text{ ms}$ sinusoidal; $T_j = 125 \text{ }^\circ\text{C}$ prior to surge; with reapplied $V_{RRM(max)}$ pulse width and repetition rate limited by T_{jmax}	-	135 150			A A
I_{RRM}	Peak repetitive reverse surge current per diode		-	1			A
T_j	Operating junction temperature		-	150			$^\circ\text{C}$
T_{stg}	Storage temperature		-65	175			$^\circ\text{C}$

1. It is not possible to make connection to pin 2 of the SOT404 package.

Rectifier diodes
Schottky barrier

PBYR20100CT, PBYR20100CTB series

THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th(j-mb)}$	Thermal resistance junction to mounting base	per diode both diodes	-	-	2	K/W
$R_{th(j-a)}$	Thermal resistance junction to ambient	SOT78 package in free air	-	60	-	K/W
		SOT404 package, pcb mounted, minimum footprint, FR4 board	-	50	-	K/W

ELECTRICAL CHARACTERISTICS

All characteristics are per diode at $T_j = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_f	Forward voltage	$I_f = 10\text{ A}; T_j = 125^\circ\text{C}$	-	0.61	0.7	V
		$I_f = 20\text{ A}; T_j = 125^\circ\text{C}$	-	0.74	0.85	V
		$I_f = 20\text{ A}$	-	0.88	0.95	V
I_R	Reverse current	$V_R = V_{RWM}$	-	5	150	μA
		$V_R = V_{RWM}; T_j = 125^\circ\text{C}$	-	5	15	mA
C_d	Junction capacitance	$V_R = 5\text{ V}; f = 1\text{ MHz}; T_j = 25^\circ\text{C to } 125^\circ\text{C}$	-	420	-	pF

Rectifier diodes
Schottky barrier

PBYR20100CT, PBYR20100CTB series

